



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 0 727 779 A1**

(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
21.08.1996 Bulletin 1996/34

(51) Int. Cl.<sup>6</sup>: **G11B 11/10**, G11B 7/007,  
G11B 7/09

(21) Application number: 96101901.5

(22) Date of filing: 09.02.1996

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 14.02.1995 JP 24949/95

(71) Applicant: HITACHI, LTD.  
Chiyoda-ku, Tokyo 100 (JP)

(72) Inventors:  
• Miyamoto, Harukazu  
Kodaira-shi (JP)

• Minemura, Hiroyuki  
Kodaira-shi (JP)  
• Sugiyama, Hisataka  
Kodaira-shi (JP)


(74) Representative: Strehl Schübel-Hopf Groening &  
Partner  
Maximilianstrasse 54  
80538 München (DE)

(54) **Optical recording method using land/groove recording and optical recording medium therefor**

(57) In an optical disk recording medium having grooves (84) and lands (85) formed on a substrate and information recording areas formed in association with both the groove and the land, prepits (82) are disposed on a virtual extension of the boundary between a groove (84) and a land (85), the prepits being disposed to satisfy such requirements that the prepits are disposed on

both sides of a virtual extension of the center line of a groove, that the prepits are disposed on both sides of a virtual extension of the center line of a land, that the prepits do not exist on both sides of a position on the center line of the groove, and that the prepits do not exist on both sides of a position on the center line of the land.

**FIG.2**

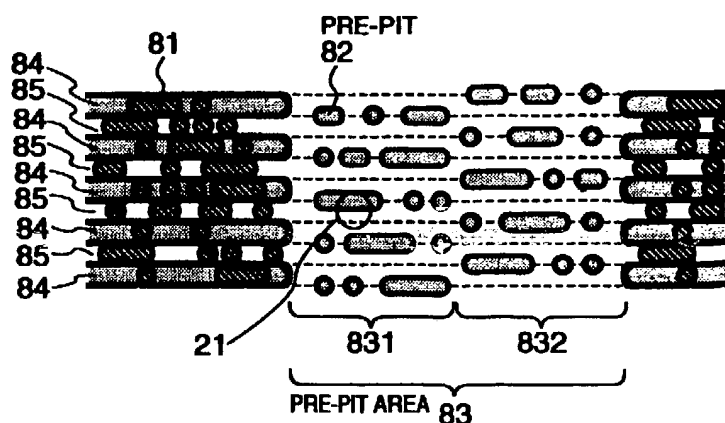

EP 0 727 779 A1

## Description

### BACKGROUND OF THE INVENTION

The present invention relates to optical recording methods and more particularly to a technique based on land/groove recording and suitable for performing high-density optical recording in which the track width is smaller than the optical spot diameter.

A conventional method is disclosed in, for example, JP-A-59-191156. In the prior art, a laser beam generated from a laser diode carried on an optical head is formed into a collimated beam by means of a collimating lens, and the collimated beam passing through a beam splitter is focused by an objective lens so as to be converged into an optical spot on a magneto-optical recording medium. The position of the optical spot on the magneto-optical recording medium is controlled by moving the lens or the optical head by means of an optical spot scanning control means. Reflected light from the magneto-optical recording medium is guided to a photodetector through a beam splitter. A readout signal from the photodetector is processed by a reproduction circuit so as to be converted into reproduced data. Control of overall reproduction is carried out by a controller.

JP-A-6-176404 describes a technique for performing high-density (narrow track) recording.

A recording medium disclosed in JP-A-6-176404 is illustrated, in plan view form, in Fig. 5. Grooves 501 and lands 502 are formed on a substrate, information recording areas are formed in association with both the groove and the land, and prepits 504 are disposed on an extension line 503 of the boundary line between a groove 501 and a land 502. Prepits 504 are positioned each groove on only one side relative to the center line of each groove. With this construction, recording information is recorded on both the groove 501 and the land 502, address information representative of the recording areas are recorded in the form of prepits 504, and one prepit is used in common to a pair of adjacent groove 501 and land 502 to provide address information therefor.

When the technique as above is applied to, for example, a phase change recording medium or a magneto-optical recording medium, interference of information (crosstalk) between adjacent grooves 501 or lands 502 due to the optical interference effect within an optical spot 505 can be prevented, thereby permitting narrowing of track. On the other hand, in the prepit area free from the optical interference effect, the address information can be common to the paired groove and land and the effective track pitch can be increased to reduce crosstalk.

In the example of JP-A-6-176404, however, the disposition of the prepit area is offset on one side of the center line of the groove and an offset tracking error signal is delivered out of the prepit area, with the result that when an optical spot is caused to track a groove or a land, a tracking error (tracking offset) increases, making

it difficult to perform high-density recording in which the track pitch is narrowed.

### SUMMARY OF THE INVENTION

An object of the present invention is to provide a technique capable of suppressing the tracking offset to a value which is sufficiently low for practical use and permitting efficient disposition of address information even when recording is effected on both the groove and the land.

To accomplish the above object, solutions of the invention are adopted as below.

More particularly, in an optical recording medium having substantially concentric grooves and lands formed on a circular substrate and information recording areas formed in association with both the groove and the land, prepits are disposed on a virtual extension line of the boundary between a groove and a land, the disposition of the prepits satisfying all of the following four conditions:

- (i) Prepits are located on both sides of an extension of the center line of one groove;
- (ii) Prepits are located on both sides of an extension of the center line of one land;
- (iii) Prepits are not located on both sides of any specific position of the center line of one groove; and
- (iv) Prepits are not located on both sides of any specific position of the center line of one land.

With this construction, disposition of prepits is not offset on either one side of a virtual extension of the center line of the groove or the land, so that an offset tracking error signal is not delivered out of the prepit area, making the tracking offset hardly occur. Further, since prepits do not exist on both sides of or symmetrically to a position on an extension of the center line of the groove or the land, interference of prepit information between adjacent tracks do not take place within a reproduction spot. Accordingly, recording can be performed on both the groove and the land and addresses can be reproduced without crosstalk to permit high-density narrow track recording.

Preferably, prepits are disposed alternately at a period which is even times a channel bit length on both sides of a virtual extension of the center line of the groove.

Thus, the prepits are uniformly disposed on both sides of a virtual extension of the center line of the groove or the land, making the tracking offset more hardly occur.

Further, the groove and the prepit have the same depth which is 70 nm or less. More preferably, the depth is 40 nm or more and 60 nm or less.

Through this, crosstalk between the groove and the land can duly be canceled and an excellent tracking servo signal can be obtained, thus making injection and production of a medium easy. With the groove depth

being in excess of 70 nm, injection of the groove is difficult to achieve. With the groove depth being about 50 nm, tracking servo is maximized and substantially the same effect can be obtained at a groove depth which is 10 nm around 50 nm.

Preferably, the groove and the land have substantially the same width which is in the range of from 0.3  $\mu\text{m}$  to 0.75  $\mu\text{m}$ .

Through this, excellent tracking can be compatible with high-density recording. If the groove and the land has a width which is not greater than 0.3  $\mu\text{m}$ , two sets of groove and land are concurrently within a single optical spot and any excellent tracking signal cannot be obtained. With the width of the groove and the land being in excess of 0.75  $\mu\text{m}$ , practical high-density recording cannot be permitted.

The minimal diameter of a prepit is made to be smaller than the width of each of the groove and land. More preferably, the diameter falls within the range of from 0.25  $\mu\text{m}$  to 0.55  $\mu\text{m}$ .

Through this, an excellent prepit signal can be obtained without crosstalk. If the diameter is not greater than 0.25  $\mu\text{m}$ , power of the prepit signal decreases extremely and with the diameter being in excess of 0.55  $\mu\text{m}$ , crosstalk takes place.

When an optical recording medium is used in which grooves and lands are formed on a substrate, information recording areas are formed in association with both the groove and the land, any groove is not formed but flat address areas are discretely formed in the information recording area, and first and second address pits are disposed in the address area on an extension of the boundary between the groove and the land, the first and second address pits being disposed to satisfy such requirements that the first and second address pits are disposed alternately on both sides of an extension of the center line of one groove, that the first and second address pits are disposed alternately on both sides of an extension of the center line of one land, that address pits do not exist on both sides of a position on an extension of the center line of the groove and that address pits do not exist on both sides of a position on an extension of the center line of the land, an optical spot is irradiated on the optical recording medium, a reflected beam from the optical recording medium is detected, an address pit is detected from the detected reflected beam to form an address pit readout signal, an address is detected on the basis of the address pit readout signal, an amplitude of a first readout signal obtained from the first address pit of the address pit readout signal is sampled and held, an amplitude of a second readout signal obtained from the second address pit of the address pit readout signal is sampled and held, the amplitudes of the first and second readout signals are compared together, an offset signal is formed on the basis of a result of comparison, and the irradiation position of the optical spot is controlled on the basis of the offset signal.

Through this, the tracking offset can be suppressed sufficiently for practical use and address information can be obtained.

When tracking is carried out by sequentially obtaining tracking servo signals through the use of a diffracted beam obtained from a groove and correcting an offset of a tracking servo signal with an offset signal, stabler tracking can be ensured. More particularly, upon detection of a reflected beam from the optical recording medium, a tracking servo signal is formed by detecting a light beam diffracted by a groove by means of a plurality of photodetectors, comparing diffracted beams detected by the plurality of photodetectors and detecting the relative positional relation between the groove and the optical spot, the tracking servo signal is corrected with an offset signal, and the irradiation position of the optical spot is controlled on the basis of the corrected tracking servo signal.

Further, an optical recording/reproducing apparatus may be constructed which uses a similar optical recording medium, comprises a light beam source, a beam focusing means for focusing and irradiating a light beam generated by the light beam source on the optical recording medium, photodetector detecting a reflected beam of the light beam irradiated by the beam focusing means, a reproduction circuit reproducing information by using a signal from the photodetector, and a scanner moving the position of an optical spot irradiated by the beam focusing means to a desired position on the optical recording medium, and further comprises means for detecting an address on the basis of a readout signal from a prepit, a low-pass filter for detecting an amplitude of a low frequency component of the readout signal from the prepit, and a circuit performing lock-in detection of a passed signal of the low-pass filter, whereby the position of the optical spot is controlled on the basis of the detected signal.

With this construction, the tracking offset can be suppressed to a smaller value.

According to an aspect of the present invention, as shown in for example Fig. 1, prepits are disposed on both sides of a virtual extension of the center line of the groove or the land in staggered relation. Accordingly, offset can be decreased to make the tracking offset hardly occur and prepits do not exist on both sides of a position on the extension of the center line of the groove or the land, with the result that interference of prepit information between adjacent tracks can be prevented within a reproduction spot and high-density narrow track recording can be ensured.

Further, even if a tracking offset takes place as shown in Fig. 3, signal amplitudes of prepits on both sides are compared to perform accurate detection of the tracking offset amount. Accordingly, by feedback-controlling the information to the scanner, the tracking offset can be suppressed.

## BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a plan view of an embodiment of an optical recording medium according to the present invention.

Fig. 2 is a fragmentary plan view of the Fig. 1 optical recording medium.

Fig. 3 is a waveform diagram showing readout waveforms in the present invention.

Fig. 4 is a block diagram of an embodiment of an optical recording/reproducing apparatus according to the present invention.

Fig. 5 is a fragmentary plan view of a prior-art optical recording medium.

Fig. 6 is a fragmentary plan view of another embodiment of the optical recording medium according to the present invention.

Fig. 7 is a waveform diagram showing readout waveforms obtained from the Fig. 6 optical recording medium.

Fig. 8 is a block diagram of an embodiment of an optical recording apparatus according to the present invention.

Fig. 9 is a waveform diagram useful to explain the principle of the optical recording apparatus of the present invention.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring now to Fig. 1, there is illustrated, in plan view form, an optical recording medium of the present invention. Grooves 84 each having a width of 0.6  $\mu\text{m}$  and a depth of 50 nm and lands 85 each having a width of 0.6  $\mu\text{m}$  are formed alternately in the radial direction of the medium and recording marks 81 are recorded on the two kinds of areas. More particularly, the land 85 and the groove 84 are both recording areas which form tracks. In a prepit area 83, any groove is not formed but prepits 82 are disposed on a flat area serving as an address area. This type of optical recording medium can be produced by forming a recording film on a disk-like substrate having grooves 84 and prepits 82, which substrate being prepared through mass production using a stamper. The prepit area 83 is formed radially of the substrate, having prepits 82 which are disposed concentrically across a plurality of tracks. The prepits are not always required to be arranged in the radial direction over the entire radius of the substrate and the prepit area may be divided into a plurality of zones which are arranged in the radial direction, forming a ZCAV (zoned constant angular velocity) or ZCLV (zoned constant linear velocity) type format which is preferable from the standpoint of high-density recording.

Referring to Fig. 2, the neighborhood of the prepit area 83 is illustrated in an enlarged view form. Pits 82 are disposed on an extension line of the boundary between a land and a groove. A pit has a width of 0.35  $\mu\text{m}$  and a depth of 50 nm. The prepit area is divided into a first prepit area 831 and a second prepit area 832. In

the first prepit area 831, pits 82 are disposed on the upper side, in the drawing, of the center line of a land 85 but in the second prepit area 832, pits 82 are disposed on the lower side, in the drawing, of the center line of the land 85. Accordingly, when an optical spot 21 scans, for example, the land 85, a signal is always produced from either one of the first and second prepit areas and consequently, there is no fear that crosstalk will occur between adjacent tracks. Therefore, address information recorded in the form of prepits can duly be reproduced without crosstalk.

Since pits 82 are not adjoined in the radius direction, injection can be facilitated upon formation by the stamper.

Also, pits 82 are uniformly disposed on both sides of a track (a land or a groove) and hence the influence of a tracking error signal, which is delivered out of the prepit area while being offset due to pits 82, upon a tracking servo signal can be canceled. Accordingly, the tracking offset can be suppressed to a minimum.

Further, when reproducing, for example, a land 85, reproduction of address information at the second prepit area 832 is carried out continuously with reproduction of address information at the first prepit area 831. Accordingly, when the two areas are united into one area in which information is arranged to provide address information for one track, an address (track number) of a land and that of a groove can be set independently of each other.

In the present embodiment, a magneto-optical recording film (TbFeCo) is used as the recording film. Accordingly, the recording mark is prepared in the form of a recorded domain. A known phase change film may also be used as the recording film. In the example of Fig. 2, one set of first and second prepit areas is provided but a plurality of sets may be provided as necessary.

Referring to Fig. 6, there is illustrated, in enlarged fragmentary plan view form, another example of the optical recording medium of the present invention. Grooves 84 each having a width of 0.5  $\mu\text{m}$  and a depth of 40 nm and lands 85 each having a width of 0.5  $\mu\text{m}$  are formed alternately and recording marks 81 are recorded on the two kinds of areas. Thus, the land 85 and the groove 84 are both recording areas. In a prepit area 83, any groove is not formed but substantially circular pits 82 (each having a diameter of 0.3  $\mu\text{m}$  and a depth of 40 nm) are disposed on an extension line of the boundary between a land and a groove. The prepit area is divided into a VFO (Variable Frequency Oscillator) area 833 and an address area 834.

Especially, in the VFO area, pits 82 are disposed alternately on the upper and lower sides of the center line of a land 85. In the address area, pits 82 are disposed alternately at the same period as that in the VFO area. Accordingly, there are no pits which exist on both sides of (or symmetrically to) a position on the center line of the land and the groove. In addition, in the address area, data for a particular track is so encoded

as to differ by one pit from data for an adjacent track. In other words, the data takes the form of a Gray code. With this construction, when an optical spot 21 scans, for example, a land 85, pits on either one side are always reproduced and there is no fear that crosstalk will occur between adjacent tracks. Therefore, address information distributed to the prebits can duly be reproduced without crosstalk. Since pits 82 for adjacent tracks do not adjoin to each other, injection can be facilitated. Also, pits 82 are uniformly disposed on both sides of a track (a land or a groove) and hence the influence of a tracking error signal, which is delivered out of the prebit area while being offset due to pits 82, upon a tracking servo signal can be canceled. Accordingly, the tracking offset can be suppressed to a minimum.

Referring to Fig. 7, readout signals obtained from the prebit area 83 in the Fig. 6 embodiment are illustrated. When an optical spot scans the center of individual tracks, signal waveforms shown in the Figure are generated of which signals 11 are generated from tracks constructed of lands 85 and signals 12 are generated from tracks constructed of grooves 84. As is clear from the Figure, the generated signals are different for the individual tracks, demonstrating that address information is recorded very efficiently. By virtue of the use of the Gray code, an address can be reproduced in the course of inter-track access, ensuring suitability to high-speed access. Further, the use of the Gray code makes an error hardly occur even in the presence of crosstalk, thus ensuring suitability to narrowing of tracks.

Referring now to Fig. 4, there is illustrated an example of construction of an optical recording/reproducing apparatus of the present invention.

In the present embodiment, a laser diode 311 having a wavelength of 680 nm is used as a light source, a laser beam is formed into a collimated beam by means of a collimating lens 312, and the laser beam is focused to an optical spot 21 on an optical disk 8 by means of an objective lens 321. As necessary, a beam shaping means such as a prism and other lenses may be provided in the optical path. The optical disk shown in Figs. 1 and 2 is used as the optical disk 8.

Power of the laser diode 311 is controlled by a light power controller 71 having the auto-power control function. Beam splitters 324 and 325 are adapted to guide a light beam 23 reflected from the optical disk 8 to photodetectors 333, 334, 340 and 341. In the present embodiment, the aperture ratio of the objective lens 321 is set to 0.55. Consequently, the diameter of the optical spot 21 on the optical disk 8 is 1.1  $\mu\text{m}$ .

The optical disk 8 is rotated by a motor 62. The optical spot 21 can be moved to a desired position on the optical disk 8 by means of a scanning mechanism. In the present embodiment, the scanning mechanism, as designated at 6, has an automatic position controller 6 also designated at 6 and having functions of auto-focus control and automatic tracking, and a lens actuator 61 controlled by the automatic position controller 6.

The reflected beam 23 from the optical disk is guided to a signal detection system by means of the beam splitters 324 and 325. Part of the reflected beam is split to two beams having different polarization planes through a half-wave plate 337, a lens 331 and a polarized beam splitter 332 and the two beams are detected by the photodetectors 333 and 334, respectively. Readout signals from the two detectors 333 and 334 are differentially amplified by a differential amplifier 944 so that information magnetically recorded on the optical disk may be detected magneto-optically. The readout signals of the two detectors 333 and 334 are also added together by means of an adder 941 so that information 14 recorded in the form of prebits on the optical disk may be detected.

The automatic position controller 6 utilizes the reflected beam 23 from the optical disk 8 to cause a tracking servo signal detector 34 to detect an optical spot position which is used for feedback control. For detection of the optical spot position, the detectors 340 and 341 detect power of a diffracted light ray from a groove in the optical disk 8 and signals delivered out of the detectors 340 and 341 are differentially amplified by a differential amplifier 342 to produce a difference signal.

Illustrated in Fig. 3 are signals obtained from the optical disk 8 shown in Figs. 1 and 2 in the present embodiment. When the optical spot 21 scans a land 85, a signal wave including magneto-electrical reproduced signal 12 shown in under side of Fig. 3 is obtained. As shown in Fig. 3, when the optical spot 21 deviates from the track center (being offset), an amplitude difference 13 takes place between prebit signal portions from the first and second prebit areas 831 and 832. This amplitude difference 13 corresponds to an amount of tracking offset.

The prebit signal 14 shown in Fig. 3 is fed to an address detection means 43 so as to be decoded to address information by an address decoder 431. At the same time, timings for signals of the first and second prebit areas are generated by a timing controller 432.

On the basis of the timing information, a first amplitude sample and hold circuit 411 stores an amplitude (average maximum amplitude) of the first prebit area and a second amplitude sample and hold circuit 412 stores an amplitude (average maximum amplitude) of the second prebit area. Alternatively, the first and second amplitude sample and hold circuits 411 and 412 may have a common amplitude sampler.

The thus held amplitudes are compared together by means of an amplitude comparator 42 to produce an amplitude difference 13. On the basis of the amplitude difference 13, a tracking offset signal 44 is formed. The tracking offset signal 44 is added with a tracking error signal 15 from the servo signal detector 34 by means of an adder 942 to produce a sum signal which in turn is fed back to the position moving means (scanning means) 6.

In the apparatus of the present embodiment, the tracking offset signal is formed on the basis of the amplitude difference 13 and the tracking error signal is corrected with the tracking offset signal to produce a corrected signal which is fed back to the position moving means. Accordingly, even when various kinds of external disturbance such as aberration of the optical spot is taken into consideration, the tracking offset can be decreased to  $\pm 0.03 \mu\text{m}$  or less. Under the nominal state devoid of optical aberration, the tracking offset is  $\pm 0.015 \mu\text{m}$  or less.

In carrying out recording with the apparatus of the present embodiment, a recording beam 22 whose power is controlled by the light power controller 71 is irradiated on the optical disk 8 to form an optical spot 21. While applying a bias field to the neighborhood of the optical spot 21 by means of a bias field power controller 72, a bias field application circuit 73 and a bias coil 74, the temperature of the recording film is heated by the optical spot 21 to a value near the Curie temperature to form a recorded domain in a heated area. In this example, the size of the recorded domain is assumed to be of a width of about  $0.5 \mu\text{m}$ .

Referring to Fig. 8, there is illustrated another example of construction of the optical recording/reproducing apparatus of the present invention. This example differs from the Fig. 4 embodiment in that the prepit signal is passed through a low-pass filter 45 and lock-in amplified by a lock-in amplifier (detector) 44, thereby forming tracking error information. In this example, the optical recording medium of Fig. 6 is used and therefore, pits 82 are disposed alternately on both sides of the center of a land 85 or a groove 84 in the VFO area 833.

Illustrated in Fig. 9 are waveforms of a VFO signal (output of the amplifier 941) and a low-pass filter signal (output of the LPF 45). In the absence of an offset, a low-pass filter component 16 of a VFO signal 15 has no amplitude but in the presence of a tracking offset, a low-pass filter component 18 of a VFO signal 17 has an amplitude. This amplitude is lock-in amplified by the lock-in amplifier 44 to detect a tracking offset. Accordingly, by feedback-controlling the offset amount to the scanning means 6, the tracking offset can be decreased. In the present embodiment, the tracking offset can be suppressed to  $\pm 0.025 \mu\text{m}$  or less.

The present invention is in no way limited to the foregoing embodiments. For example, an optical head capable of generating a plurality of optical spots at a time may also be used. In addition to the magneto-optical recording medium, a phase change recording medium may be used. Further, in addition to the method using the diffracted beam, a three-spot detection method in which power levels of reflected beams from a plurality of optical spots are compared together or a prewobbling method may be used as the servo signal detection method.

By using the optical recording medium of the present invention, the tracking offset can be suppressed

to a level which is sufficiently small for practical use ( $0.03 \mu\text{m}$  or less) and address information can be obtained easily even during high-density narrow track recording.

By using the optical recording/reproducing apparatus of the present invention, the tracking offset can be decreased easily through feedback control.

## Claims

1. An optical disk recording medium comprising:  
a substrate in the form of a circular disk;  
substantially concentric grooves (84) and lands (85) formed on said substrate, said grooves (84) and said lands (85) both serving as recording tracks, said recording tracks being divided into recording units in the circumferential direction, each recording unit having a flat address area (83) devoid of said groove (84); and  
first address information (831) and second address information (832) formed alternately in said address area (83) on both sides of the center line of one track, said first information and second information not existing on both sides of a position on the center line of one track (Figs. 1 and 2).
2. An optical disk recording medium according to claim 1, wherein said address information takes the form of uneven prebits (82) formed in said substrate.
3. An optical disk recording medium according to claim 2, wherein said address area extends across a plurality of recording tracks in the radial direction of said optical disk recording medium.
4. An optical disk recording medium according to claim 3, wherein said groove (84) and prebit (82) have the same depth which is  $70 \text{ nm}$  or less.
5. An optical disk recording medium according to claim 3, wherein said groove (84) and prebit (82) have the same depth which is  $40 \text{ nm}$  or more and  $60 \text{ nm}$  or less.
6. An optical disk recording medium according to claim 3, wherein said groove (84) and land (85) have substantially the same width which is  $0.3 \mu\text{m}$  or more and  $0.75 \mu\text{m}$  or less.
7. An optical disk recording medium according to claim 3, wherein said prebit (82) has a minimal diameter which is smaller than the width of each of said groove (84) and land (85).
8. An optical disk recording medium according to claim 3, wherein said prebit (82) has a minimal diameter which is smaller than the width of each of

said groove (84) and land (85), said minimal diameter being in the range of from 0.25  $\mu\text{m}$  to 0.55  $\mu\text{m}$ .

9. An optical disk recording medium according to claim 1, wherein pieces of said address information (82) are disposed alternately at a period on both sides of an extension of the center line of a groove (84), said period being even times a period at which information recording marks are recorded on said recording track (Fig. 6).
10. An optical recording method using an optical recording medium (8) in which grooves (84) and lands (85) are formed on a substrate, information recording areas are formed in association with both said groove (84) and said land (85), any groove is not formed but flat address areas are diskretely formed in said information recording area, first and second address pits (82, 831, 832) are disposed in said address area on an extension of the boundary between said groove (84) and said land (85), said first and second address pits being disposed to satisfy such requirements that said first and second address pits are disposed alternately on both sides of an extension of the center line of one groove, that said first and second address pits are disposed alternately on both sides of an extension of the center line of one land, that address pits do not exist on both sides of a position on an extension of the center line of the groove and that address pits do not exist on both sides of a position on an extension of the center line of the land, said method comprising the steps of:
  - irradiating an optical spot on said optical recording medium;
  - detecting a reflected beam from said optical recording medium (8);
  - detecting an address pit (82) from the detected reflected beam to form an address pit readout signal;
  - detecting an address on the basis of the address pit readout signal;
  - sampling and holding an amplitude of a first readout signal obtained from the first address pit of the address pit readout signal;
  - sampling and holding an amplitude of a second readout signal obtained from the first address pit of the address pit readout signal;
  - comparing the amplitudes of the first and second readout signals;
  - forming an offset signal on the basis of a result of comparison; and
  - controlling the irradiation position of the optical spot on the basis of the offset signal (Fig. 4).
11. An optical recording method according to claim 10, wherein upon detection of a reflected beam from said optical recording medium, a tracking servo signal is formed by detecting a light beam diffracted by

a groove by means of a plurality of photodetectors, comparing diffracted beams detected by said plurality of photodetectors and detecting the relative positional relation between said groove and said optical spot, the tracking servo signal is corrected with an offset signal, and the irradiation position of said optical spot is controlled on the basis of the corrected tracking servo signal.

12. An optical recording/reproducing apparatus using an optical recording medium (8) in which grooves (84) and lands (85) are formed on a substrate, information recording areas are formed in association with both said groove (84) and said land (85), and prepits (84) are disposed on a virtual extension of the boundary between a groove (84) and a land (85), said prepits (82) being disposed to satisfy such requirements that said prepits (82) are disposed on both sides of a virtual extension of the center line of a groove, that said prepits are disposed on both sides of a virtual extension of the center line of a land, that said prepits do not exist on both sides of a position on the center line of the groove, and that said prepits do not exist on both sides of a position on the center line of the land, said apparatus comprising:
  - a light source (311);
  - an optical system (312, 324, 321) for focusing and irradiating a light beam generated by said light source (311) on said optical recording medium (8) in the form of an optical spot (21);
  - photodetectors (333, 334) for detecting a reflected beam from said optical recording medium (8);
  - reproduction means for reproducing information by using signals from said photodetectors (333, 334);
  - a position control circuit (6) for moving the position of an optical spot (21) irradiated by said optical system to a desired position on said optical recording medium (8);
  - an address decode circuit (431) for detecting an address on the basis of a readout signal from said prepit (82) obtained from said photodetectors;
  - means (941) for detecting an amplitude of the readout signal from said prepit (82);
  - means (41) for holding said amplitude; and
  - comparison means (42) for comparing a detected amplitude with the held amplitude,
 whereby said scanning means (6) is controlled on the basis of an output of said comparison means (42) to control the position of said optical spot (21).
13. An optical recording/reproducing apparatus using an optical recording medium in which grooves and lands are formed on a substrate, information recording areas are formed in association with both said groove and said land, and prepits are disposed

on a virtual extension of the boundary between a groove and a land, said prebits being disposed to satisfy such requirements that said prebits are disposed on both sides of a virtual extension of the center line of a groove, that said prebits are disposed on both sides of a virtual extension of the center line of a land, that said prebits do not exist on both sides of a position on the center line of the groove, and that said prebits do not exist on both sides of a position on the center line of the land, and having light beam generation means, beam focusing means for focusing and irradiating a light beam generated by said light beam generation means on said optical recording medium, photodetection means for detecting a reflected beam of the light beam irradiated by said beam focusing means, reproduction means for reproducing information by using a signal from said photodetection means, and scanning means for moving the position of an optical spot irradiated by said beam focusing means to a desired position on said optical recording medium, said apparatus comprising:

means for detecting an address on the basis of a readout signal from a prebit;

a low-pass filter for detecting an amplitude of a low frequency component of the readout signal from said prebit; and

means for performing lock-in detection of a passed signal of said low-pass filter,

whereby the position of the optical spot is controlled on the basis of the detected signal (Fig. 8).

14. An optical recording medium comprising:

a substrate in the form of a circular disk; substantially concentric grooves (84) and lands (85) formed on said substrate;

information recording areas formed in association with both said groove (84) and said land (85); and

prebits (82) disposed on a virtual extension of the boundary between a groove (84) and a land (85), said prebits being disposed to satisfy all of the following requirements:

(i) said prebits are on both sides of an extension of the center line of one groove (84),

(ii) said prebits are on both sides of an extension of the center line of one land (85),

(iii) said prebits do not exist on both sides of a position on an extension of the center line of one groove (84), and

(iv) said prebits do not exist on both sides of a position on an extension of the center line of one land (85).

5

10

15

20

25

30

35

40

45

50

55



FIG.1

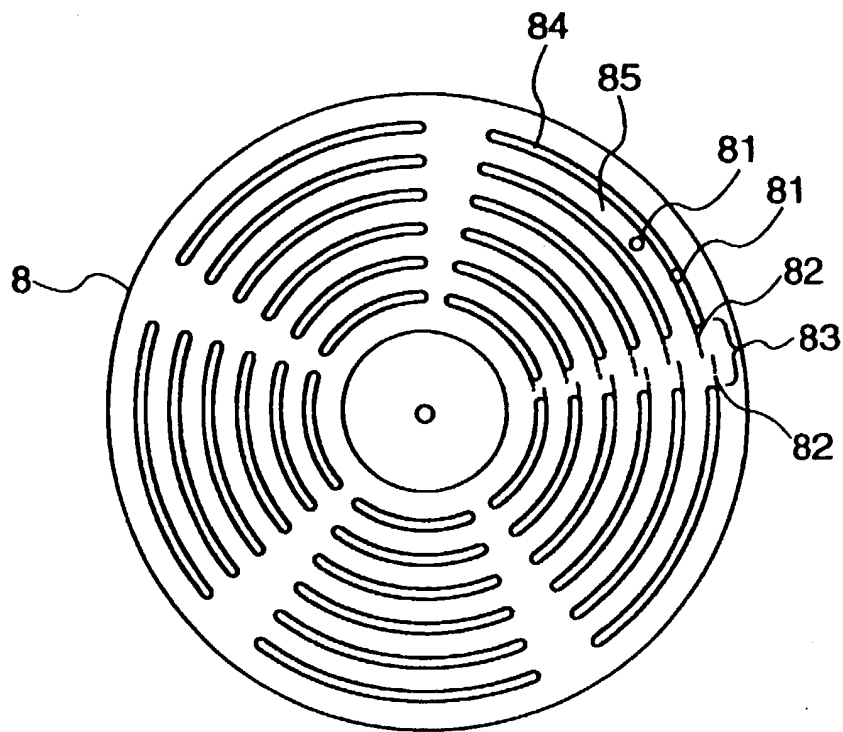


FIG.2

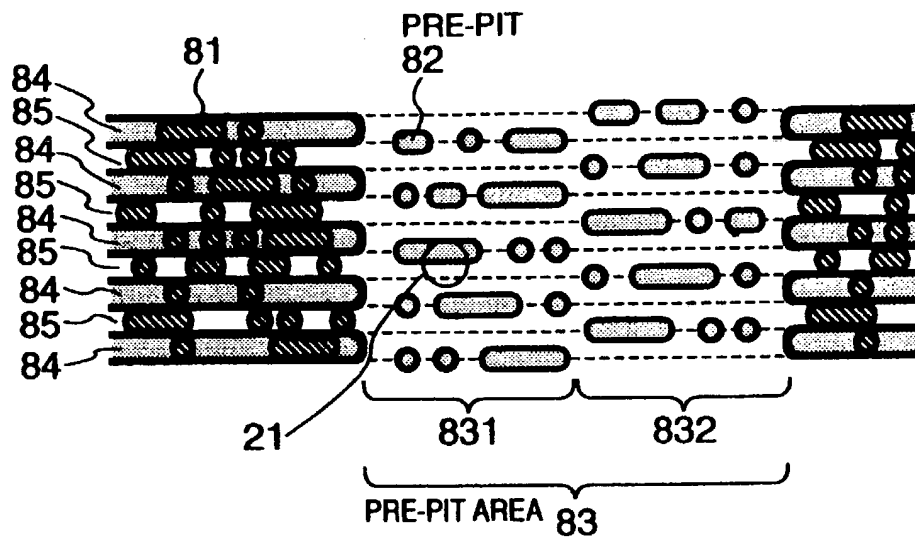


FIG.3

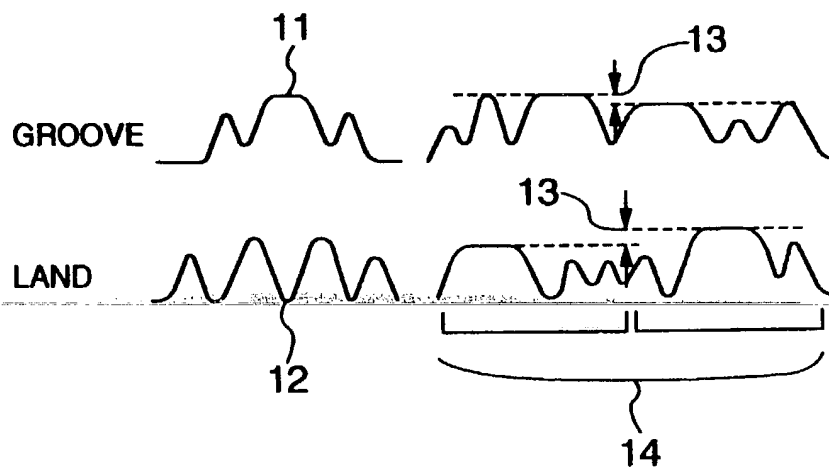


FIG. 4

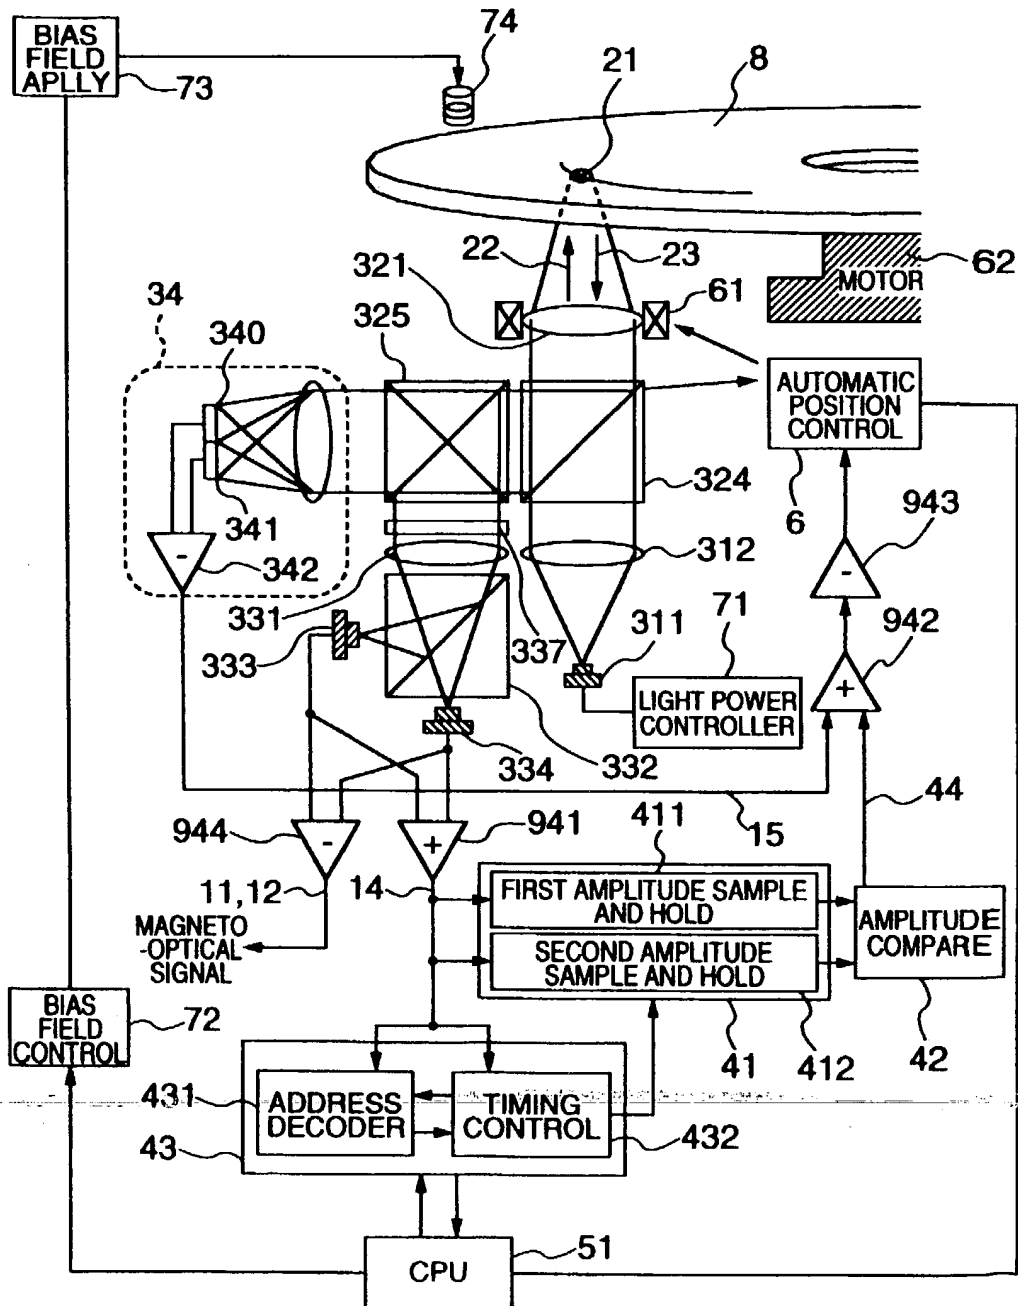


FIG.5  
PRIOR ART

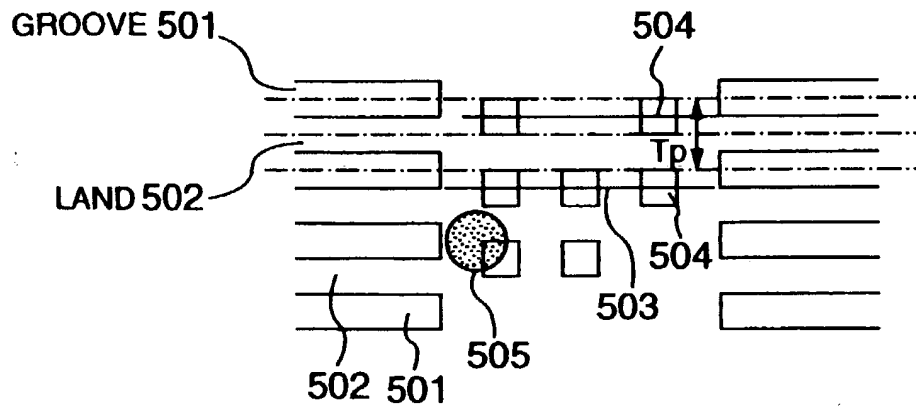


FIG.6

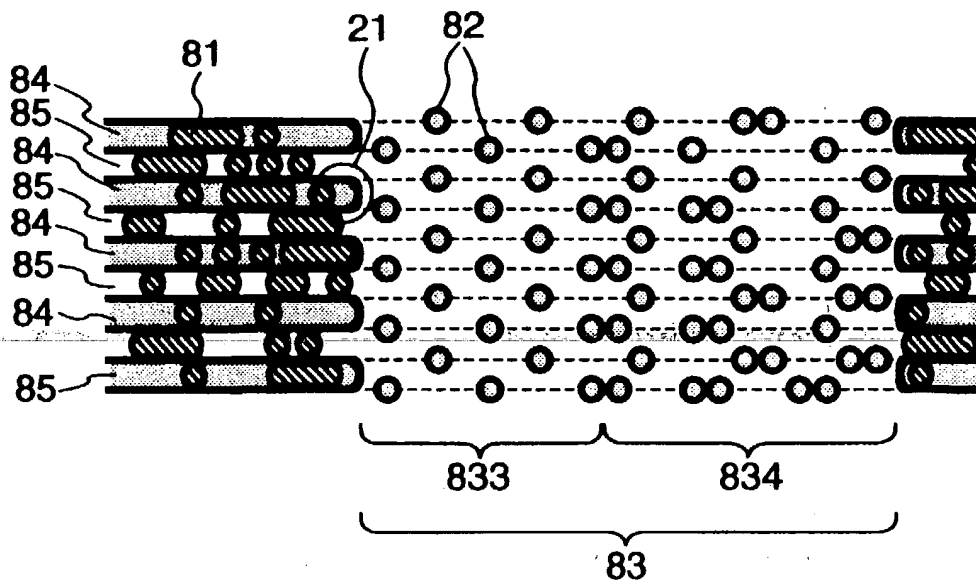


FIG.7

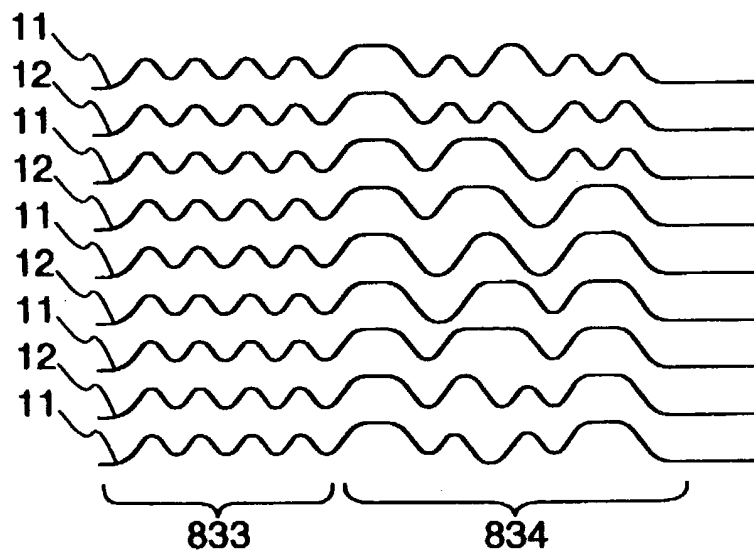


FIG.8


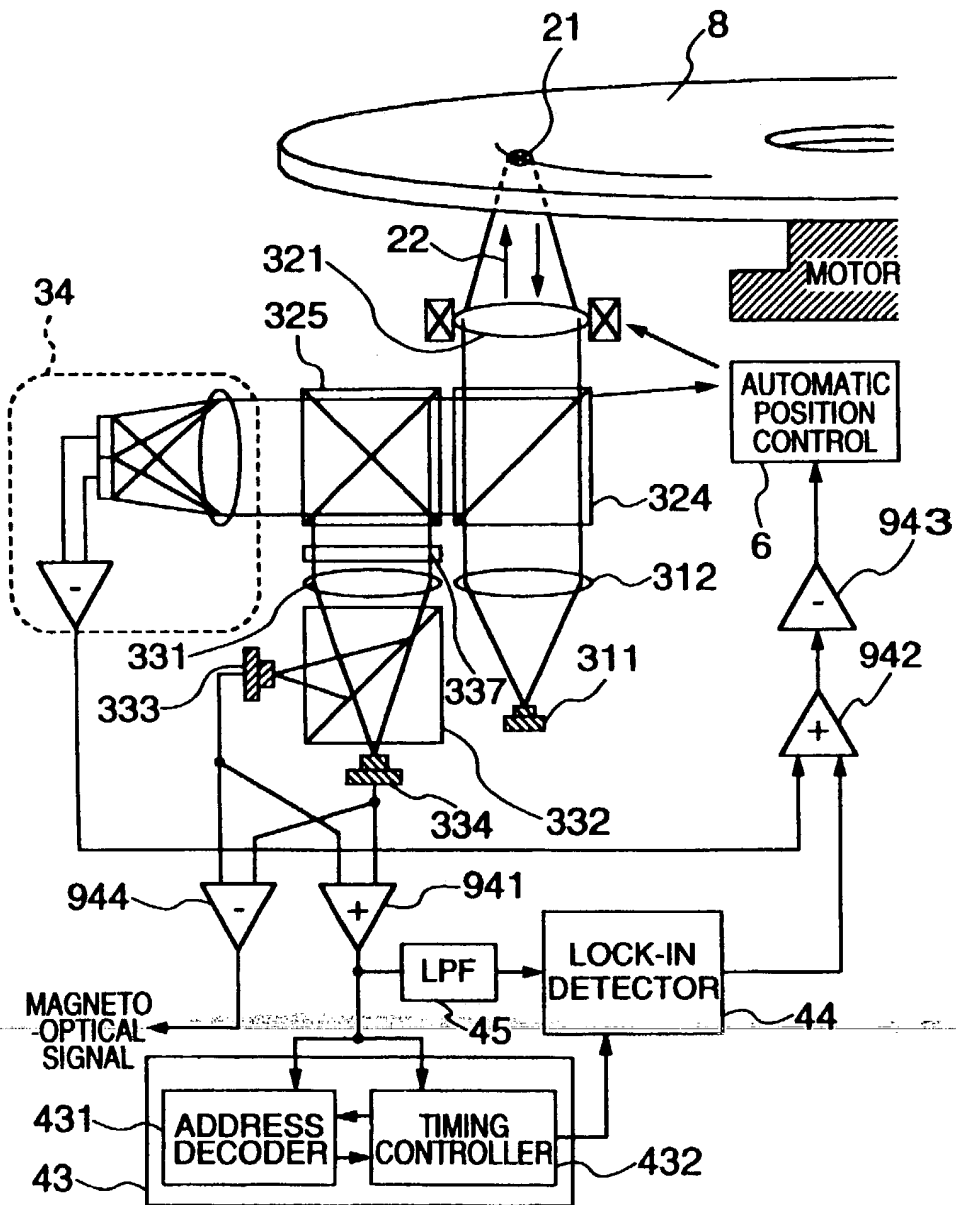


FIG.9



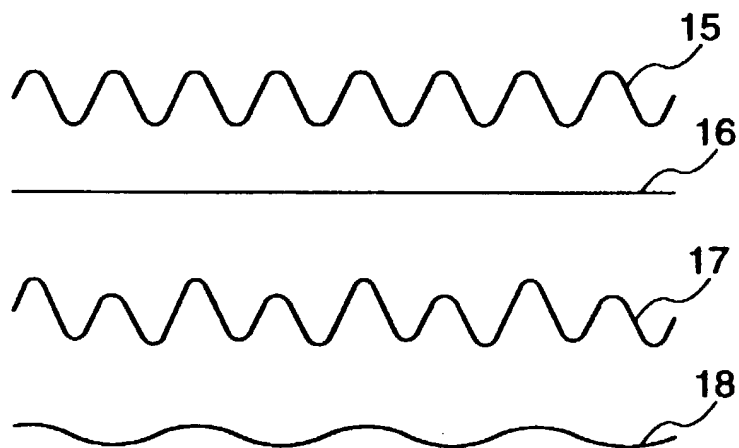

European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 96 10 1901

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	PATENT ABSTRACTS OF JAPAN vol. 018, no. 564 (P-1819), 27 October 1994 & JP-A-06 203411 (MATSUSHITA ELECTRIC IND CO LTD), 22 July 1994, * abstract *	1-3,14	G11B11/10 G11B7/007 G11B7/09
Y	---	10-12	
A	---	4-6,13	
Y	DE-A-36 20 301 (HITACHI LTD) 2 January 1987 * column 9, line 34 - column 10, line 6; figure 3A * * column 16, line 40 - column 17, line 30; figure 10 * * column 18, line 4 - line 25 *	10-12	
A	---		
A	EP-A-0 588 305 (MATSUSHITA ELECTRIC IND CO LTD) 23 March 1994 * column 32, line 1 - column 33, line 41; figures 13,14 *	1,10, 12-14	
D	& PATENT ABSTRACTS OF JAPAN vol. 18, no. 519 (P-1807), 29 September 1994 & JP-A-06 176404 , 24 June 1994, * abstract *		TECHNICAL FIELDS SEARCHED (Int.Cl.6) G11B
A	---		
A	PATENT ABSTRACTS OF JAPAN vol. 016, no. 102 (P-1324), 12 March 1992 & JP-A-03 278336 (SONY CORP), 10 December 1991, * abstract *	1-3,7, 10,12-14	
P,X	---		
P,X	PATENT ABSTRACTS OF JAPAN vol. 95, no. 011 & JP-A-07 296390 (VICTOR CO OF JAPAN LTD), 10 November 1995, * abstract *	1-3,14	
	-----		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23 May 1996	Examiner Holubov, C
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 01.82 (P04 COI)